


Safety Screws with AW® Drive

- For the reliable fastening of protective screens, cellar grills etc.

- Material: Galvanized steel, blue passivated. Steel Ruspert-II coating.


- Head shape: decorative head with AW® 40 drive and sealing plug.
- Strength 5.8.
- With metric thread.
- General construction permission in conjunction with Würth Wedge Anchor W-ED/W-ED/S Art. Pre-No. 0904.

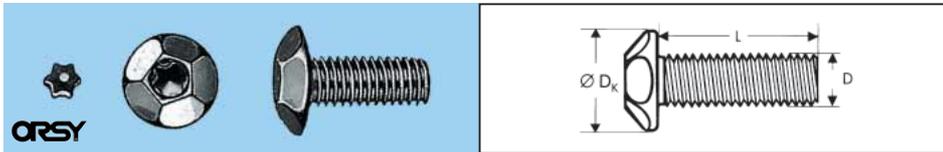

Dia. L in mm	M8 Dia. D _k = 17 mm Galv. steel, blue pass. Art. No.*	P. Qty.	M10 Dia. D _k = 19 mm Galv. steel, blue pass. Art. No.*	P. Qty.	M12 Dia. D _k = 19.5 mm Galv. steel, blue pass. Art. No.*	P. Qty.
	0265 18 20		0265 110 20		— 0265 112 25	
20		25		25		25
25	0265 18 25		0265 110 25			
30	0265 18 30		0265 110 30		—	
40	0265 18 40		0265 110 40		—	
50	0265 18 50		0265 110 50		—	

* Bit 1/4 AW 40 and sealing plugs are included in every package.


<p>European Technical Approval Option 7 for uncracked concrete</p>	<p>European Technical Approval Multiple attachment of non load-bearing systems in concrete</p>
---	---

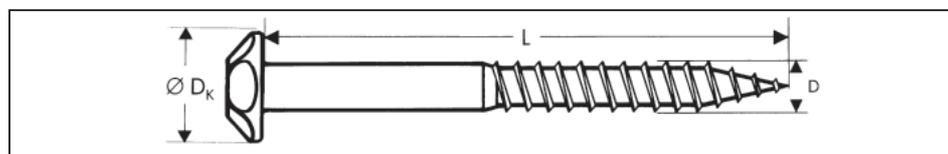

Dia. x L in mm	Dia. D _k in mm	Drive	Galv. steel, blue pass. Art. No.*	P. Qty.	Ruspert-II coating Art. No.*	P. Qty.	Stainless steel A2 Art. No.*	P. Qty.
			0265 27 85		0265 027 85		0265 57 85	
7 x 85	17	AW 40		25		25		25
7 x 105			0265 27 105		0265 027 105		0265 57 105	
7 x 120			0265 27 120		0265 027 120		—	

* Bit 1/4 AW 40 and sealing plugs are included in every package.

- With dowel screw thread.
- Design galvanized steel: suitable for Würth Frame-Fixing Anchor TYPE WE and WD Art. Pre-No. 0912.

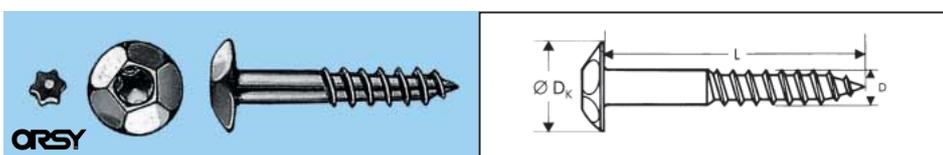


Dia. x L in mm	Dia. D _k in mm	Drive	Galv. steel, blue pass. Art. No.*	P. Qty.	Ruspert-II coating Art. No.*	P. Qty.	Stainless steel A2 Art. No.*	P. Qty.
			0265 37 40		0265 037 40		— 0265 67 50	
7 x 40	17	AW 40		25		25		25
7 x 50			0265 37 50		0265 037 50		0265 67 50	
10 x 85	19	AW 40	0265 310 85	25	0265 031 85	25	0265 610 85	25
10 x 105			0265 310 105		0265 031 105		—	

* Bit 1/4 AW 40 and sealing plugs are included in every package.

- With wood screw thread similar to DIN 571.

Ruspert-II coating:

- Highest corrosion resistance: salt spray test according to DIN 50021: 1,000 h Kesternich test SFW 2.0 according to DIN 50018: 12 cycles
- Comparison salt spray test according to DIN 50021:

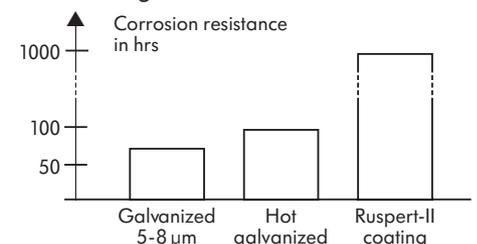

- Material: zinc diecast.

Sealing Plugs for Safety Screws

Suitable for:	Art. No.	P. Qty.
Only for safety screws with Art. Pre-No. 0265	0265 940	25