

## Steca Solarix PLI

5000-48, 2400-24

The Steca Solarix PLI is the first product from Steca Elektronik to offer an all-in-one package. It allows users to supply consumers with 230 V AC power, charges the battery with an integrated MPPT charge controller, and at the same time permits connection to a generator or an available electricity grid. Everything in a single device. This means that solar energy can be used as the top priority, for example. And if that isn't enough, a generator can be started or the supply can be switched to the public grid. At the same time, the battery can also be recharged by either the generator or the grid. Given its very quick switchover time of up to 10 ms and its flexible energy priority selection, the Solarix PLI also acts as an uninterruptible power supply. Even difficult consumers, such as large AC motors, can be started reliably with dual overload capacity. The maximum power point tracker in the integrated charge controller ensures that, even in adverse weather conditions, the maximum output is obtained from the PV modules in order to optimally charge the battery and supply the consumers with power at the same time.

### Product features

- True sine wave voltage
- High overload capacity
- Integrated MPP tracker
- Multistage charging technology
- Monthly equalisation charge
- Auxiliary contact for starting the generator
- Adjustable cut-off voltages
- Battery type: gel / liquid lead battery
- Lightweight construction
- Easy installation

### Electronic protection functions

- Overcharge protection
- Reverse polarity protection of modules, for battery via fuse
- Deep discharge protection
- Short circuit protection of load and module
- Reverse polarity protection by internal fuse
- Reverse current protection at night
- Overtemperature and overload protection
- Acoustic alarm
- PE connection

### Displays

- Graphical LC display
- 3 multi-coloured LEDs show operating states

### Operation

- Simple menu-driven operation
- Programming by buttons

### Interfaces

- RS-232 serial interface to PC
- Connection to PC via USB

### Options


- Interconnectable in parallel or in three phases (parallel kit required)

### Certificates


- Compliant with European Standards (CE)
- RoHS compliant
- Manufactured according to ISO 9001 and ISO 14001

### Accessories

- PC software is enclosed

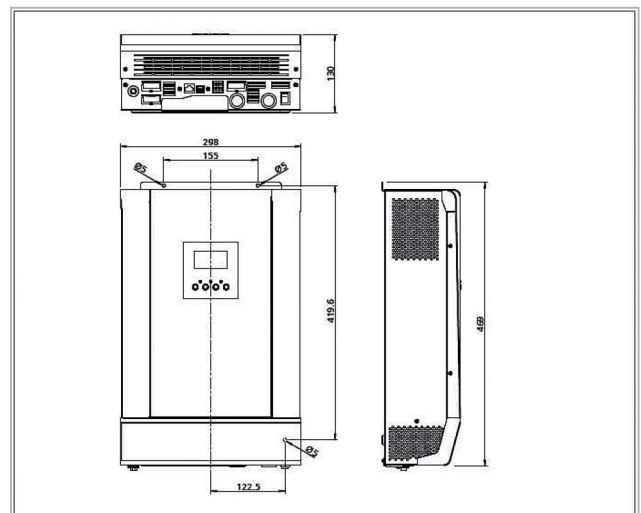

## Solar priority with grid connection and/or generator:

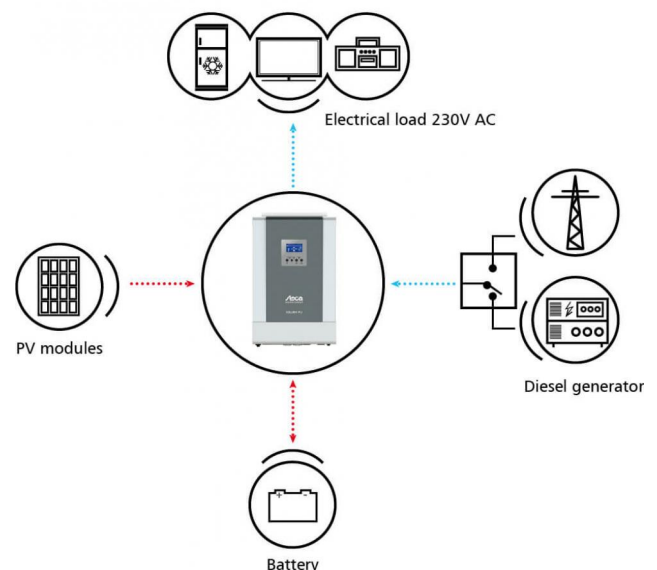

	2400-24	5000-48
<b>Characterisation of the operating performance</b>		
System voltage	24 V	48 V
Continuous power	3000 VA	5000 VA
Power 5 sec.	6000 VA	10000 VA
Max. efficiency sine wave	> 91 %	> 93 %
Max. efficiency charge controller		> 98 %
Own consumption standby	14.0 W	15.0 W
Own consumption ON	45.0 W	50.0 W
<b>Input side</b>		
Input voltage	90 V AC ... 280 V AC	
Max. current on transfer system	30 A	40 A
Input frequency	40 ... 65 Hz 50 / 60 Hz (automatic detection)	
Transfer time	10 ms typical (UPS mode)	
<b>AC output side</b>		
Output voltage	220 V AC ... 240 V AC +/-5 %	230 V AC +/-5 %
Output frequency	50 / 60 Hz	
<b>Battery side</b>		
Battery voltage	20 V ... 30 V	38.4 V ... 66 V
Max. charge current of PV	40 A	80 A
Max. charge current of AC	30 A (programmable)	60 A (programmable)
End of charge voltage	27.0 V (programmable)	54.0 V (programmable)
Boost charge voltage	28.2 V (programmable)	56.4 V (programmable)
Equalisation charge	29.2 V (programmable)	60.0 V (programmable)
Set battery type	liquid (programmable)	
<b>DC input side charge controller</b>		
Min. MPP voltage	30 V	60 V
Max. MPP voltage	80 V	115 V
Min. open circuit voltage solar module / input (at minimum operating temperature)	36 V	72 V
Max. open circuit voltage solar module / input (at minimum operating temperature)	100 V	145 V
Max. module current	40 A	80 A
Nominal charge power	1168 W	4800 W
Own consumption	< 2 W	
<b>Operating conditions</b>		
Operating temperature	0 °C ... + 55 °C	
Storage temperature	- 15 °C ... + 60 °C	
Rel. humidity	< 95 %, non-condensing	
Maximum altitude	2000 a.s.l	
<b>Fitting and construction</b>		
Terminal (AC - fine / single wire)	8 mm <sup>2</sup> - AWG 8	
Terminal (PV - fine / single wire)	8 mm <sup>2</sup> - AWG 8	12 mm <sup>2</sup> - AWG 6
Battery connection (M6 ring terminal included)	35 mm <sup>2</sup> ... 50 mm <sup>2</sup> AWG 2 ... AWG 0	
Double throw signal contact	3 A / 250 V AC (max. 150 W) 3 A / 30 V DC	
Degree of protection	IP 21	
Dimensions (X x Y x Z)	275 x 385 x 114 mm	298 x 469 x 130 mm
Weight	7,6 kg	11,5 kg
Cooling principle	fan	

• Technical data at 25 °C / 77 °F