


## SKINTOP® DIX-M

SKINTOP® DIX-M, NBR multiple sealing inserts, higher packing density allows smaller part construction, easy insertion of several cables



UV-resistant

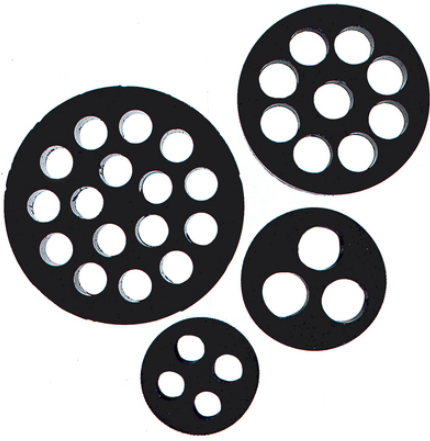

Temperature-resistant



Optimum strain relief



Assembly time



Kompletterande automationskomponenter från Lapp

### Benefits

Easy insertion of several cables into one gland  
Higher packing density allows smaller part construction

### Application range

For use in SKINTOP® cable glands.  
A sealing ring with several holes is used in place of the inner sealing insert.

### Note

IP 68 can be achieved when all openings are closed and all bores are optimally occupied, i.e. when using cables with nominal diameter and/or SKINTOP® DIX-DV sealing plugs

### Product Make-up

SKINTOP® DIX-M FKM is resistant to oil, water, alkaline solutions, acids, solvents etc.

Last Update (09.02.2018)

©2018 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16

**SKINTOP® DIX-M****Technical Data**

Classification:	ETIM 5.0 Class-ID: EC000032 ETIM 5.0 Class-Description: Plug for cable screw gland
On request:	Special shapes
Colour delivered:	Black, RAL 9005
Material:	NBR FKM
Protection rating:	IP 54

**Note**

Photographs are not to scale and do not represent detailed images of the respective products.  
Prices are net prices without VAT and surcharges. Sale to business customers only.

**SKINTOP® DIX-M**

Article number	Article designation / size	Size M	Number of cables x cable Ø
SKINTOP® DIX-M			
53316220	16220	M 16	2 x 2
53316230	16230	M 16	2 x 3
53316240	16240	M 16	2 x 4
53316420	16420	M 16	4 x 2
53320250	20250	M 20	2 x 5
53320260	20260	M 20	2 x 6
53320340	20340	M 20	3 x 4
53320353	20353	M 20	3 x 5.3
53320440	20440	M 20	4 x 4
53320920	20920	M 20	9 x 2
53320430	20430	M 20	4 x 3
53325260	25260	M 25	2 x 6
53325250	25250	M 25	2 x 5
53325350	25350	M 25	3 x 5
53325360	25360	M 25	3 x 6
53325370	25370	M 25	3 x 7
53325450	25450	M 25	4 x 5
53325540	25540	M 25	5 x 4
53325640	25640	M 25	6 x 4
53332270	32270	M 32	2 x 7
53332280	32280	M 32	2 x 8
53332290	32290	M 32	2 x 9
53332370	32370	M 32	3 x 7
53332380	32380	M 32	3 x 8
53332460	32460	M 32	4 x 6
53332470	32470	M 32	4 x 7
53332560	32560	M 32	5 x 6
53332650	32650	M 32	6 x 5
53332840	32840	M 32	8 x 4
53332850	32850	M 32	8 x 5
53332940	32940	M 32	9 x 4
53340290	40290	M 40	2 x 9
53340310	40310	M 40	3 x 10
53340480	40480	M 40	4 x 8

Last Update (09.02.2018)

©2018 Lapp Group - Technical changes reserved

 Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03\_16

**SKINTOP® DIX-M**

Article number	Article designation / size	Size M	Number of cables x cable Ø
53340490	40490	M 40	4 x 9
53340580	40580	M 40	5 x 8
53340590	40590	M 40	5 x 9
53340670	40670	M 40	6 x 7
53340860	40860	M 40	8 x 6
53340969	40969	M 40	9 x 6.9
53350118	50118	M 50	11 x 8
53350680	50680	M 50	6 x 8
53350780	50780	M 50	7 x 8
53350870	50870	M 50	8 x 7
53350147	50147	M 50	14 x 7
53350164	50164	M 50	16 x 4
53350166	50166	M 50	16 x 6
SKINTOP® DIX-M FKM			
53420250	20250	M 20	2 x 5
53420260	20260	M 20	2 x 6
53440969	40969	M 40	9 x 6.9

Last Update (09.02.2018)

©2018 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)You can find the current technical data in the corresponding data sheet.  
PN 0456 / 02\_03\_16